

isc Silicon NPN Power Transistors

BUS11/A

DESCRIPTION

- High Switching Speed
- Collector-Emitter Sustaining Voltage-  
:  $V_{CEO(SUS)} = 400V$  (Min)-BUS11  
450V (Min)-BUS11A

APPLICATIONS



- Designed for use in converters, inverters, switching regulators, motor control systems etc.

ABSOLUTE MAXIMUM RATINGS( $T_a=25^{\circ}C$ )

SYMBOL	PARAMETER	MAX	UNIT	
$V_{CES}$	Collector- Emitter Voltage( $V_{BE} = 0$ )	BUS11	850	V
		BUS11A	1000	
$V_{CEO}$	Collector-Emitter Voltage	BUS11	400	V
		BUS11A	450	
$V_{EBO}$	Emitter-Base Voltage	9	V	
$I_C$	Collector Current-Continuous	5	A	
$I_{CM}$	Collector Current-Peak	10	A	
$I_B$	Base Current	2	A	
$I_{BM}$	Base Current-Peak	4	A	
$P_C$	Collector Power Dissipation @ $T_C=25^{\circ}C$	100	W	
$T_j$	Junction Temperature	200	$^{\circ}C$	
$T_{stg}$	Storage Temperature Range	-65~200	$^{\circ}C$	

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th j-c}$	Thermal Resistance, Junction to Case	1.75	$^{\circ}C/W$

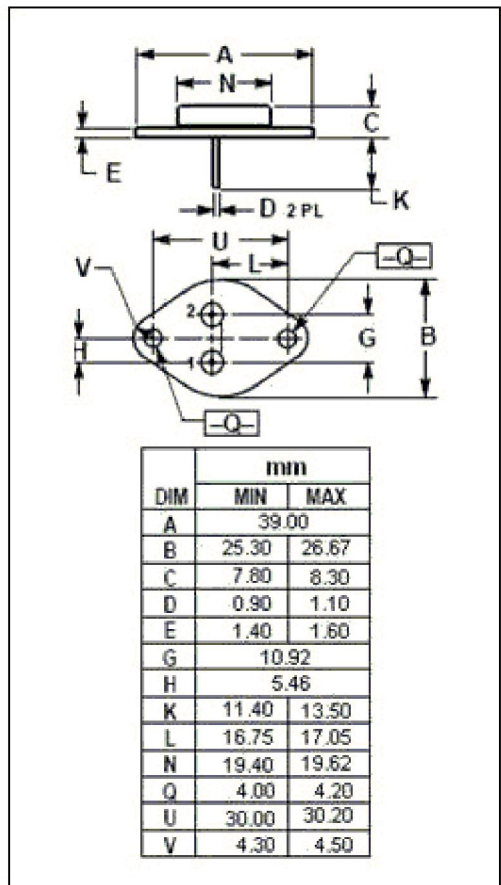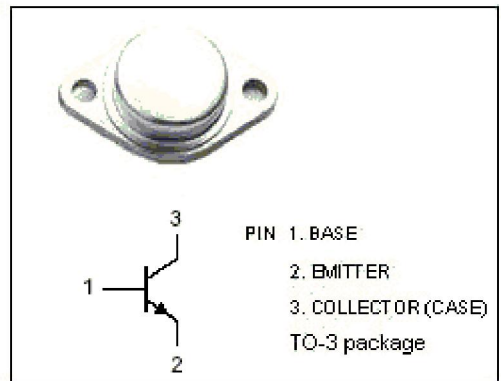

## isc Silicon NPN Power Transistors

## BUS11/A

## ELECTRICAL CHARACTERISTICS

 $T_C=25^{\circ}\text{C}$  unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CEO(SUS)}$	Collector-Emitter Sustaining Voltage	BUS11	$I_C=0.1\text{A}; I_B=0; L=25\text{mH}$			V
		BUS11A				
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	BUS11	$I_C=3\text{A}; I_B=0.6\text{A}$		1.5	V
		BUS11A				
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	BUS11	$I_C=3\text{A}; I_B=0.6\text{A}$		1.4	V
		BUS11A				
$I_{CES}$	Collector Cutoff Current	$V_{CE}=V_{CESMmax}; V_{BE}=0$ $V_{CE}=V_{CESMmax}; V_{BE}=0; T_J=125^{\circ}\text{C}$			1 2	mA
$I_{EBO}$	Emitter Cutoff Current	$V_{EB}=9\text{V}; I_C=0$			10	mA
$h_{FE}$	DC Current Gain	$I_C=1\text{A}; V_{CE}=5\text{V}$	15		50	

## Switching Times , Resistive Load

$t_{on}$	Turn-On Time	For BUS11 $I_C=3\text{A}; I_{B1}=-I_{B2}=0.6\text{A}$ For BUS11A $I_C=2.5\text{A}; I_{B1}=-I_{B2}=0.5\text{A}$			1.0	$\mu\text{s}$
$t_{stg}$	Storage Time				4.0	$\mu\text{s}$
$t_f$	Fall Time				0.8	$\mu\text{s}$