

Product Description:

- Tinned ,annealed,stranded or solid copper conductor.
- PVC insulation
- PVC jacketed
- Tinned or bare copper wire spiral or braid shield
- Rated temperature:105℃.Rated voltage:300Volts
- Passes UL VW-1&CSA FT1 vertical flamt test

说明:

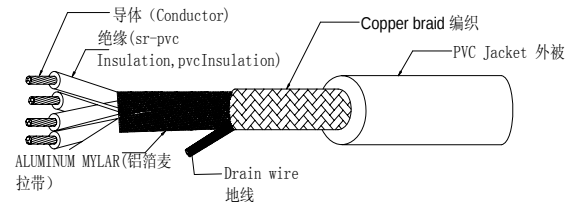
- 导体使用单股或绞线裸铜或镀锡铜。
- PVC绝缘
- PVC被覆
- 裸铜或镀锡铜丝，缠绕或编织屏蔽
- 额定温度：105℃ 额定电压：300Volts
- 可通过UL VW-1 及 CSA FT1，垂直燃烧测试

Applications:

- For internal wiring of computer, audio&video equipment.

应用:

- 用于电脑及视听设备内部连线。

Construction:**构造:**

UL Style& CSA Type	Cores 芯数	Conductor 导体		Insulation Thickness 绝缘厚度	Nom.Dia	shield COVERAGE 屏蔽 覆盖率	Jacket Thickness 被覆厚度	Overall Diameter 完成外径	Conductor Resistance at 20℃ 导体电阻
		线号	线数/线径						
		AWG	No/mm						
UL2517 CSA (Stranded) 绞线	2C	30	7/0.100	0.41	1.10	≥65	0.76	4.40	381.00
		28	7/0.127	0.41	1.20	≥65	0.76	4.50	239.00
		26	7/0.16	0.43	1.30	≥65	0.76	4.80	150.00
		24	11/0.16	0.41	1.40	≥65	0.76	5.00	94.20
		22	17/0.16	0.43	1.60	≥65	0.76	5.40	59.40
		20	21/0.178	0.41	1.80	≥65	0.76	5.80	36.70
		18	34/0.178	0.41	2.10	≥65	0.76	6.40	23.20
		16	26/0.25	0.41	2.40	≥65	0.76	7.00	14.60
UL2517 CSA (Stranded) 绞线	3C	30	7/0.100	0.41	1.10	≥65	0.76	4.60	381.00
		28	7/0.127	0.41	1.20	≥65	0.76	4.80	239.00
		26	7/0.16	0.41	1.30	≥65	0.76	5.00	150.00
		24	11/0.16	0.43	1.40	≥65	0.76	5.20	94.20
		22	17/0.16	0.41	1.60	≥65	0.76	5.60	59.40
		20	21/0.178	0.41	1.80	≥65	0.76	6.00	36.70
		18	34/0.178	0.41	2.10	≥65	0.76	6.70	23.20
UL2517 CSA (Stranded) 绞线	4C	30	7/0.100	0.41	1.10	≥65	0.76	4.80	381.00
		28	7/0.127	0.41	1.20	≥65	0.76	5.00	239.00
		26	7/0.16	0.41	1.30	≥65	0.76	5.30	150.00
		24	11/0.16	0.41	1.40	≥65	0.76	5.60	94.20
		22	17/0.16	0.41	1.60	≥65	0.76	6.00	59.40
		20	21/0.178	0.41	1.80	≥65	0.76	6.50	36.70
UL2517 CSA (Stranded) 绞线	5C	30	7/0.100	0.41	1.10	≥65	0.76	5.20	381.00
		28	7/0.127	0.41	1.20	≥65	0.76	5.40	239.00
		26	7/0.16	0.41	1.30	≥65	0.76	5.70	150.00
		24	11/0.16	0.41	1.40	≥65	0.76	6.00	94.20
		22	17/0.16	0.41	1.60	≥65	0.76	6.50	59.40
UL2517 CSA (Stranded) 绞线	6C	30	7/0.100	0.41	1.10	≥65	0.76	5.50	381.00
		28	7/0.127	0.41	1.20	≥65	0.76	5.80	239.00
		26	7/0.16	0.41	1.30	≥65	0.76	6.00	150.00
		24	11/0.16	0.41	1.40	≥65	0.76	6.40	94.20