


RF Connectors

SMA Reverse Series



SMA Reverse connectors with 50Ω impedance are designed for using in spread spectrum wireless applications which a non-standard interface is needed.

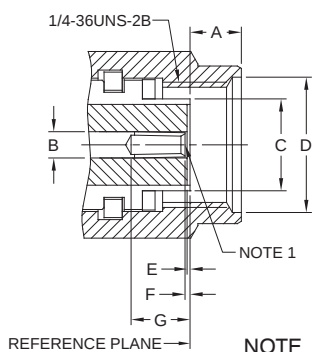


PLUG

Dimension	PLUG	
	Millimeters	
	Minimum	Maximum
A	2.54	3.43
B	1.24	1.30
C	4.53	4.59
D	6.35	6.73
E	0.00	0.25
F	0.00	0.25
G	2.92	--

NOTE

In order to meet the VSWR and CR values as specified, the inner hole diameter needs to be mated with a 0.9/0.94mm dia. pin.

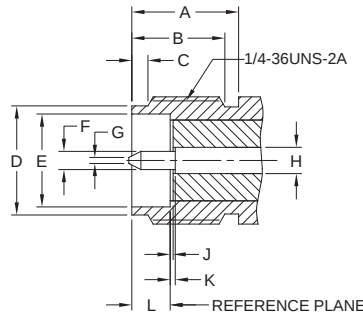

JACK

Dimension	JACK	
	Millimeters	
	Minimum	Maximum
A	5.54	--
B	4.32	--
C	0.38	1.14
D	5.28	5.49
E	4.60	4.67
F	0.90	0.94
G	0.00	0.38
H	1.24	1.30
J	0.00	0.25
K	0.00	0.25
L	1.88	1.98

Electrical

Impedance	50 Ω
Frequency Range	0 - 12.4 GHz on Flexible cable 0 - 18 GHz on Semi-rigid cable
Working Voltage	RG-178: 170 V rms max. RG-316, .085": 250 V rms max. RG-142, .141": 335 V rms max. RG-178: 500 V rms min. RG-316, .085": 750 V rms min. RG-142, .141": 1000 V rms min.
Dielectric Withstanding Voltage	
VSWR	Straight: 1.3 max. Right Angle: 1.5 max.
Contact Resistance	Center Contact: 6 mΩ max. Outer Contact: 2 mΩ max.
Insulator Resistance	5000 MΩ min.

Material

Parts Name	Material	Finish
Body, Metal Parts	Brass per QQ-B-626	Gold 0.07μm (3 μ")
Center Contacts	Male: Brass per QQ-B-626 Female: Beryllium copper per QQ-C-530	Gold 0.75μm (30 μ") Gold 0.75μm (30 μ")
Insulators	Teflon	None
Crimp Ferrules	Annealed Brass	Gold 0.07μm (3 μ")
Crimp Gaskets	Silicone rubber	None

NOTE: Other materials and platings are available on request.

Mechanical & Environmental

Engagement Force	22 cNm max.
Disengagement Force	22 cNm max.
Coupling Nut Retention	678 cNm min.
Coupling Proof Torque	170 cNm min.
Contact Retention	68 cNm min.
Durability(Mating)	500 cycles min.
Temperature Range	-65°C to +155°C
Vibration	MIL-STD-202 Method 204 Test Cond. B.
Salt Spray	MIL-STD-202 Method 101 Test Cond. B.
Thermal Shock	MIL-STD-202 Method 107 Test Cond. B.

How to order

RF X - SR X - XX X 5 xx - 58

Gender

P = Plug
J = Jack

Orientation

R = Right Angle
S = Straight

Mounting Type / Adaptor Type

B1 = THT Board Mount
C1 = Crimp Cable

other types on request

Detail

N = Not defined


others on request

Cable Group / Receptacle Type

Code allocated
by E-tec

RF Connectors




SMA Reverse Series

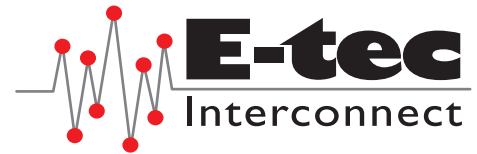

STRAIGHT THT JACK



Order Code
RFJ-SRS-B1N592-58






PCB Hole Layout

R/A THT JACK



Order Code
RFJ-SRR-B1N592-58




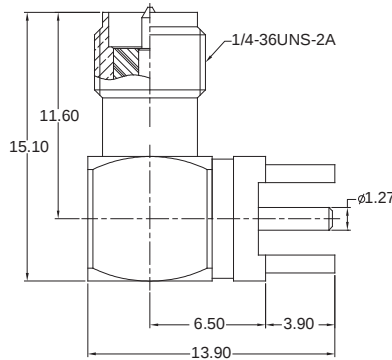


PCB Hole Layout

CRIMP JACK







Order Code
RFJ-SRS-C1N502-58

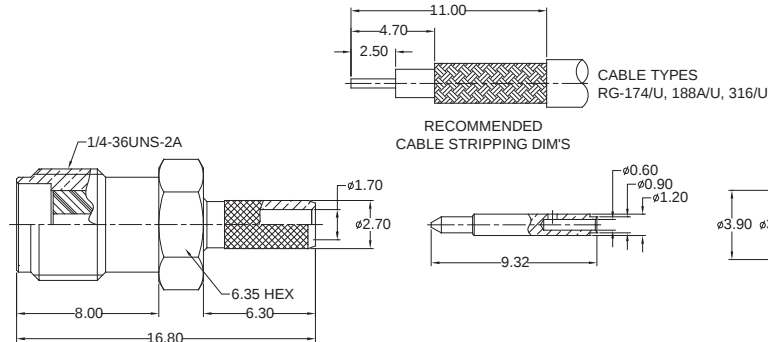


CRIMP PLUG






Order Code
RFP-SRS-C1N502-58

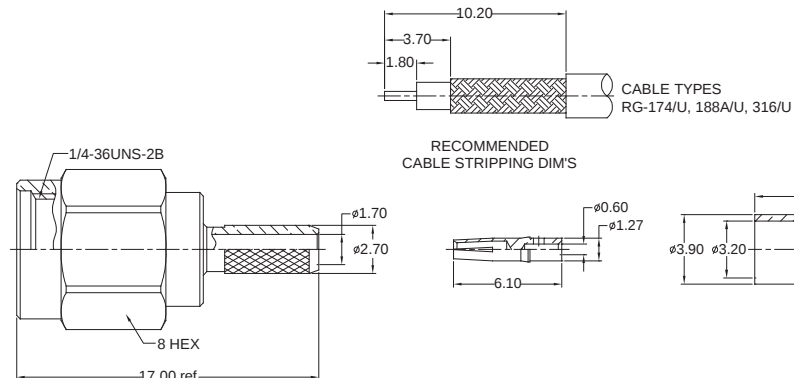

R/A CRIMP PLUG



Order Code
RFP-SRR-C1N502-58

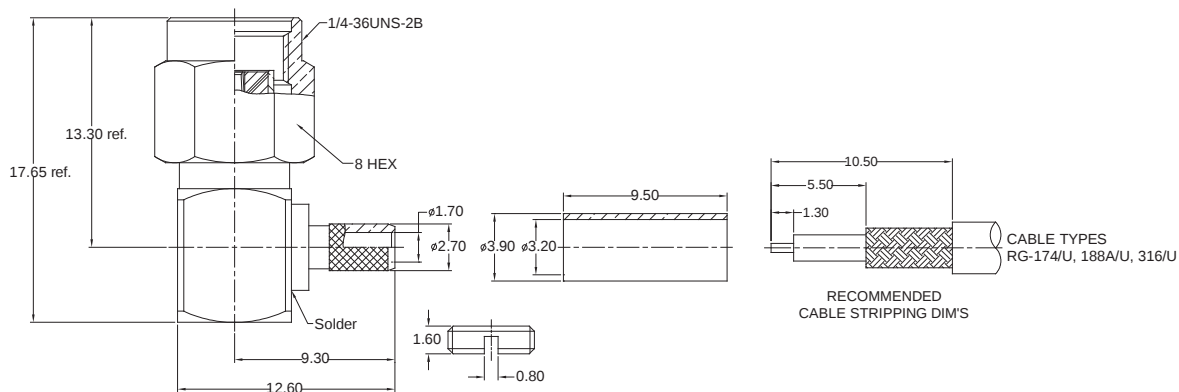

RECOMMENDED CABLE STRIPPING DIM'S

Other SMA Reverse types available on request