




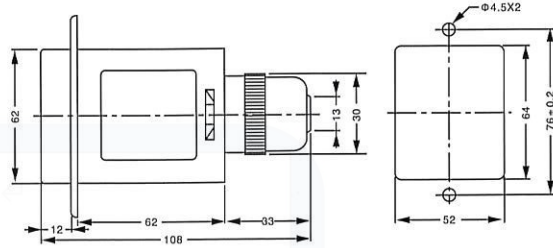
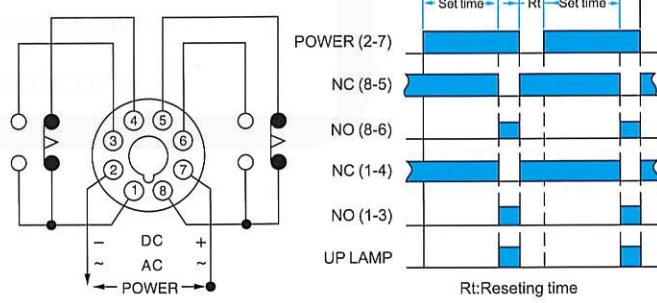
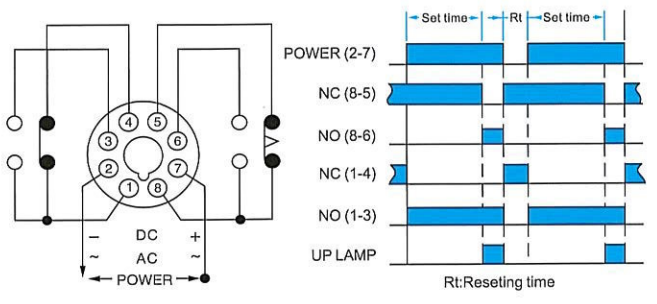


DIGITAL TIMER 數字型限時繼電器

T2D-N		T2D-Y	
DIMENSIONS(mm)尺寸		DIMENSIONS(mm)尺寸	
			
60H×48W×75D		88H×58W×75D	
			
SURFACE(-N)露出型		FLUSH(-Y)埋入型	
8PFA		US-08 or P3G-08	
			
FULL TIMING RANGE 時間範圍		T□D-N2/Y2 限時 2C 5A	
SEC: 9.9, 99 MIN: 9.9, 99 H R: 9.9, 99		Mode A 	
RATED VOLTAGE 額定電壓		T□D-N3/Y3 限時 1C 5A, 瞬時 1C 5A	
DC(V): 12, 24 AC(V): 12, 24, 48, 110, 220, 240, 380, 415, 440, 50/60Hz		Mode B 	
INDICATOR OPERATING 指示燈動作			
Time up operating 計時到指示			
LIFE 壽命	MECHANICAL 機械	5 × 10 ⁶ times	
	ELECTRICAL 電氣	10 ⁵ times	
ACCURACY 精確度	REPEAT ERROR 往復誤差	± 0.05% sec	
	SETTING ERROR 設定誤差	0	
	VOLTAGE ERROR 電壓誤差	± 0.05% sec	
	TEMP. ERROR 溫度誤差	± 0.05% sec	
RESET TIME 復歸時間		0.3 sec max	
CONSUMED POWER 消耗功率		2VA	
AMBIENT TEMPERATURE 使用周圍溫度		-10°C~+55°C	
AMBIENT HUMIDITY 使用周圍濕度		45~85%RH	
WEIGHT 重量		220g	