



0505 KSS 黏式配線固定座 SELF ADHESIVE TIE MOUNT

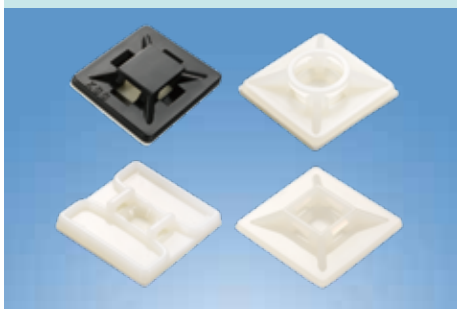


| 型號 Item No. | L | W | 帶孔 W1 | H | 固定孔 M | 包裝 Packing |
|----------------|------|------|----------|-----|----------|---------------|
| ※ HC-100-S4 | 12.5 | 12.5 | 3.2 | 3.2 | | 100pcs |
| ※ HC-101S-S2 | 19.5 | 19.5 | 4.6 | 3.9 | 3.2 | |
| HC-101S | 19.5 | 19.5 | 4.6 | 3.9 | 3.2 | |
| HC-101 | 21.8 | 21.8 | 4.8 | 4.0 | | |
| HC-101SA | 19.0 | 19.0 | 4.0 | 4.5 | 3.4 | |
| HC-102 | 28.6 | 28.6 | 5.5 | 5.3 | 5.0 | |
| HC-102A | 28.0 | 28.0 | 5.3 | 5.6 | 5.6 | |
| HC-103 | 29.2 | 29.2 | 5.5 | 5.4 | 5.0 | |
| HC-25 | 26.1 | 26.1 | 8.0 | 6.0 | 4.3 | |
| HC-19R | 18.9 | 18.9 | 4.2 | 4.6 | 4.8 | |
| HC-26R | 26.3 | 26.3 | 5.6 | 6.0 | 5.0 | |
| HC-18T | 19.0 | 19.0 | 4.1 | 5.0 | 4.4 | |
| HC-26T | 26.5 | 26.5 | 5.8 | 7.4 | 4.3 | |
| HC-3838 | 38.5 | 38.5 | 10.2 | 7.6 | 5.0 | |


單位：mm




HC-26T




HC-100




HC-101S




HC-101




HC-101SA, 102A




HC-102




HC-103




HC-25



HC-19R, 26R



HC-18T



HC-3838


材質：UL合格之NYLON66 本色 (另備黑色)，防火等級94V-2，底座背膠。
用法：將底座背膠離型紙撕去，接著將固定座貼於鐵板上，再以紮線帶固定電線，可省去面板鑽孔之麻煩。

※HC-100-S4：4連式 (特殊設計，離型紙容易剝離)

※HC-101S-S2：2連式 (特殊設計，離型紙容易剝離)


適用之紮線帶：紮線帶寬度小於帶孔(W1)者。

0510 KSS 紮線固定座 SADDLE TYPE TIE MOUNT

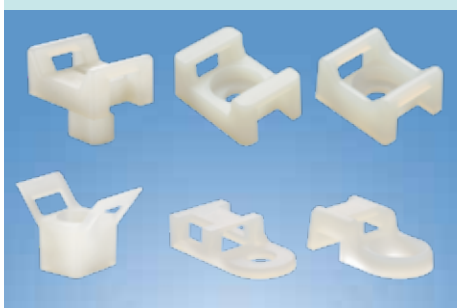


| 型號 Item No. | L | W | 帶孔 W1 | H | 固定孔 M | 包裝 Packing |
|----------------|------|------|----------|------|----------|---------------|
| HC-0 | 19.6 | 9.5 | 5.2 | 5.0 | 3.7 | 100pcs |
| HC-0M | 19.0 | 9.5 | 5.0 | 5.0 | 4.3 | |
| HC-0L | 19.0 | 9.5 | 5.0 | 5.0 | 5.2 | |
| HC-0R | 19.1 | 10.0 | 5.4 | 6.2 | 4.2 | |
| HC-1 | 15.0 | 10.0 | 5.1 | 7.0 | 3.5 | |
| HC-1S | 12.8 | 7.0 | 4.0 | 5.8 | 3.3 | |
| HC-2S | 23.0 | 16.0 | 9.0 | 9.8 | 5.0 | |
| HC-2 | 23.0 | 16.0 | 9.0 | 9.8 | 6.3 | |
| HC-2A | 20.5 | 17.1 | 10.4 | 10.4 | 6.0 | |
| HC-2L | 23.0 | 16.0 | 9.0 | 9.8 | 6.5 | |
| HC-3 | 23.0 | 13.8 | 9.5 | 17.5 | 5.3 | |
| HC-4 | 30.0 | 14.7 | 9.3 | 11.6 | 5.0 | |
| HC-5 | 21.5 | 16.0 | 7.8 | 10.0 | 9.7X5.8 | |


單位：mm




HC-0, 0L, 0M




HC-0R




HC-1, 1S, 2, 2A, 2S, 2L



HC-3



HC-4



HC-5

材質：UL合格之NYLON 66 本色 (另備黑色)，防火等級 94V-2。
用法：先將固定座以螺絲固定，再以紮線帶固定電線。馬鞍形設計使電線易於固定。

適用之紮線帶：紮線帶寬度小於帶孔(W1)者。

※HC-5需插入固定孔旋轉卡住。