



trident

HARDWARE



India's Favorite Glass Hardware

COMPANY PROFILE

TRIDENT Architectural Hardware is one of the most professional dealer in Floor Hinge, Patch Fitting, Glass Connectors, Shower Hinges, Glass Door Handles Locks without Cutout, Spider Fittings etc.

TRIDENT Architectural Hardware it's an part of S-Toughen glass which in glass business since 1986. Our products are perfect at glass, to perform under the most demanding circumstance. Latest design that make statement intuitive and offer exceptional safety, manufacturing facilities utilize modern engineering process exceptional technical staff in order to ensure customer satisfaction & reliability.

We follow stringent quality checking methods and abide by international standards. Regular up gradation of quality standards ensures that all products leaving our premises are up to the quality specification of the market.

We are the most favorite glass hardware in India!





INDEX

- Floor Springs & Door Closer 01
- Patch Fittings 02
- Door Locks Series 03-05
- Sliding Wheel 06-07
- Sliding System 08-10
- Automatic System 11
- Shower Hinge 12-13
- Shower Stabilizer 14
- Sealing Strips 15
- Shower Knobs 16
- Door Handles 17-22
- Spiders 23
- Lifting Suckers 24



TR-663W
Hydraulic Top Patch



TR-663
Front Side



Back Side
(Note: upper patch used TR-20)



TR-84
Carrying capacity 90-120 kgs
Maximum door width 1.1 meter



TR-65
Carrying capacity 80-100 kgs
Maximum door width 1 meters



TR-220B
Hydraulic Top Patch

- Suitable door weight: Max 100kg
- Suitable door width: 750~1000mm
- Suitable door thickness: 8~13mm



TR-071 DCR Door Closer
DCR63: Carrying capacity 60-65kgs
DCR60: Carrying capacity 40-60kgs
Colours: White, Silver, Beige, Black & Brown



TR-081
Hold open at 90° (selected on request)
Door weight up to 35~55kg
Fit for doors up to 1100mm wide
Two controlled closing speed ranges



TR-84AC
Floor Spring Accessories
Suitable for wooden & Aluminium doors



TR-10 Bottom Fitting
With insert for most floor hinges
(selected by from
ACCESSORIES FOR PATCH FITTINGS)



By casting stainless steel

TR-20 Top Fitting
With Powder metallurgy for long lasting



By casting stainless steel

TR-30 Over Panel Fitting
Accessories:
Side plate and screws included



By casting stainless steel

TR-40 Corner Transom Fitting
Suitable for TR-20



Can be choose

TR-53 Center Lock
Brass cylinder & computer keys



TR-150D



TR-141 Corner Transom Fitting with Fin
Strike box type fitting available on request (TR-141/K)
Available for Left & Right orientation TR-141L & TR-141R



TR-481
Wall to Glass Connector



TR-582
Glass to Glass Connector



TR-122
Two Way Glass Connector



TR-122A
Four Way Glass Connector



TR-160A
Corner Transom Connector



Economic

TR-563M
Wall to Glass Side Connector
Supporting screws included



TR-529 Turn Knob Lock



TR-529G
Turn Knob Lock Strike Box
Suitable for TR-529 locks



TR-583
Two Way Glass Connector with Fin
Suitable for two glasses with fin



TR-585
Four Way Glass Connector with Fin
Suitable for four glasses with fin



TR-502C
Point welding for keeping strong



TR-29W
Wall to Glass Door Lock with Latch Plate



TR-29
Glass to Glass Shower Lock



TR-009
Glass to Glass Door Lock with Strike Box
No Glass Cut Out required



Key/Key

TR-010
Glass to Glass Door Lock with Strike Box
No Glass Cut Out required



Key/Knob

TR-010A
Glass to Glass Door Lock with Strike Box
No Glass Cut Out required



Single side keys

TR-011S
Wall to Glass Door Lock with Latch Plate
No Glass Cut Out required



Single side keys

TR-011SA

Wall to Glass Door Lock with Latch Plate
No Glass Cut Out required



TR-011

Glass to Glass Door Lock with Strike Box
No Glass Cut Out required



TR-012A

No need to drill glass hole



TR-35B

No need to drill glass



TR-33C

Wall to Glass Door Lock with Handle



TR-32C

Wall to Glass Door Lock with Handle



TR-37



TR-34C Key / Key



TR-34



TR-120

Glass to Wall Shower Lock
Brass body chrome finish



TR-120G

Glass to Glass Shower Lock
Brass body chrome finish



One side knob
One side key

TR-120K

Glass to Wall Shower Lock
Brass body chrome finish



TR-120KG
Glass to Glass Shower Lock
Brass body chrome finish Glass to Glass



TR-118
Glass to Wall Shower Lock
Brass body chrome finish



TR-119
Glass to Glass Shower Lock
Brass body chrome finish



TR-203W
Wall to Glass Shower Lock
No Glass Cut Out required



TR-192
Wall to Glass Shower Lock
No Glass Cut Out required



TR-193
Glass to Glass Shower Lock
No Glass Cut Out required



TR-198
Wall to Glass Door Lock with Latch Plate
No Glass Cut Out required
Brass body chrome finish



TR-199
Glass to Glass Shower Lock
No Glass Cut Out required
Brass body chrome finish



TR-196 Turn Knob Lock
Suitable for 10mm Glass,
No Glass Cut out required



TR-197 Turn Knob Lock
Suitable for 10mm Glass,
No Glass Cut out required



TR-696P



TR-696G



TR-196R
Glass to Wall Shower Lock
Stainless Steel(304 or 316)



TR-408



TR-888K
Moving door lock


Sliding Wheel




A B
Can choose A or B



TR-333
One set with stopper,
track etc
Φ30mm stainless steel

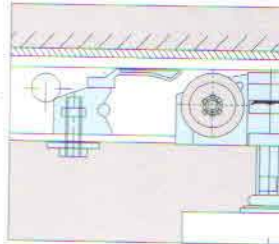


End cap
Require Additional Order

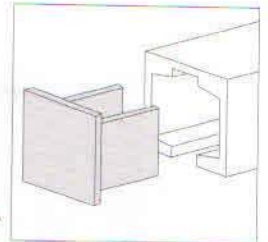


A B
Can choose A or B



TR-333A
80x55mm Alumium

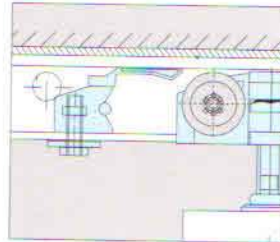


End cap
Require Additional Order

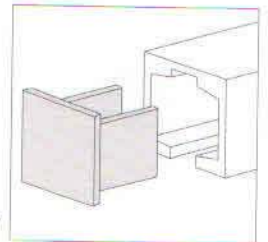


A B
Can choose A or B



TR-324
Φ60mm brass

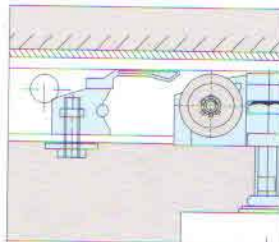



End cap
Require Additional Order

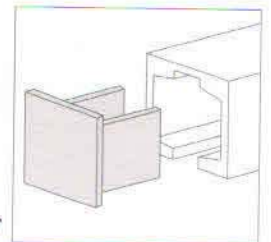





TR-111

TR-626
Max door weight: 120kg

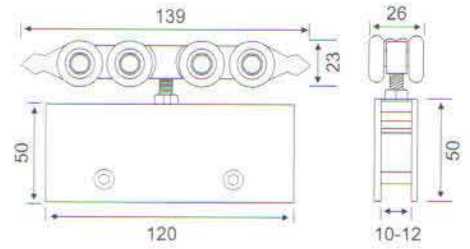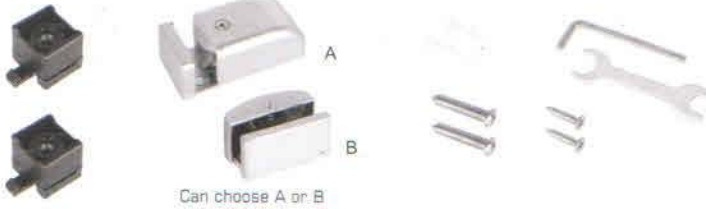



TR-111

TR-623
Max door weight: 120kg

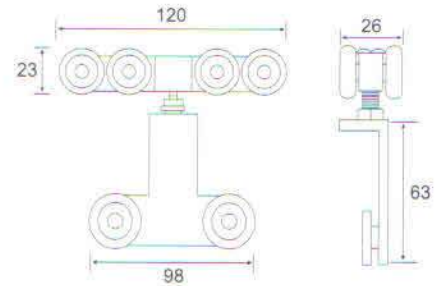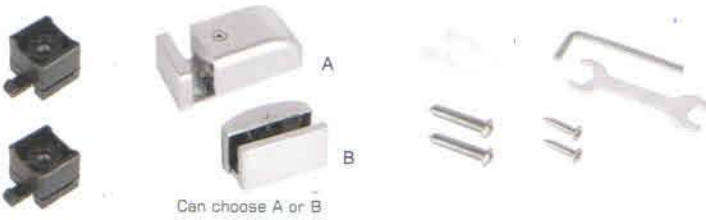

TR-111

TR-625
Max door weight: 120kg

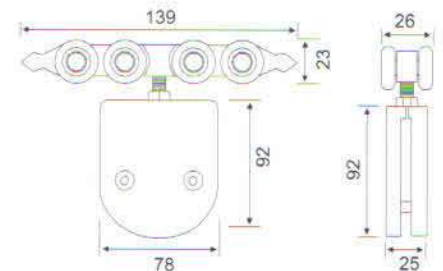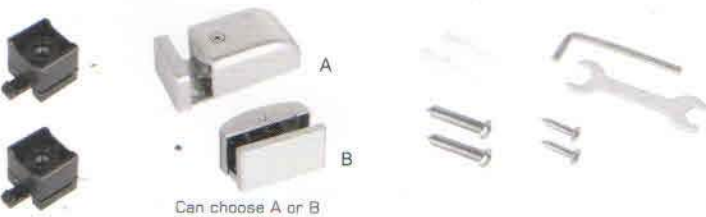



TR-888-SET
 Sliding System
 With Countersunk Type or Flat Type
 For 10-12mm thick glass
 For $\Phi 25$ mm track
 Maximum door weight: 150kg



TR-830A-3



TR-830A-3



TR-830A-3



TR-830A-3



TR-831A



TR-831A



TR-830-7



TR-830-7



TR-830-4L



TR-830-4R



TR-830S



Install Tool



TR-800A-SET
 Sliding System
 With Countersunk Type or Flat Type
 For 10-12mm thick glass
 For $\Phi 25$ mm track
 Maximum door weight: 100kg



TR-805AC



TR-805AC



TR-805AC



TR-805AC



TR-800A



TR-800A



TR-830-7



TR-830-7



TR-830-4L



TR-830-4R



TR-830S



Install Tool




TR-866-SET For 30x10mm pipe
Maximum door weight: 70kg




TR-866

Plane installation diagram

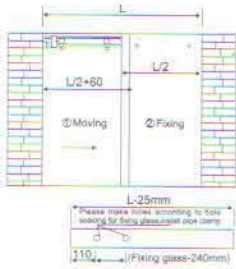

Sectional installation diagram
30x10 square pipe with anti-skip rod

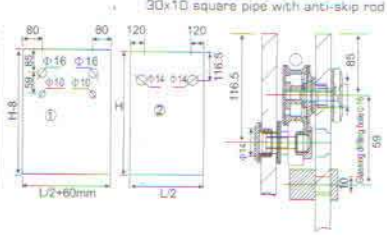

TR-866-1



TR-866-2



TR-866-3



TR-866-4



TR-866-5
Select by your choice
for 8-12mm glass



TR-866-6
Select by your choice



TR-888A



TR-830C-1
Left / Right Side
Point Fix Corner
Transom Fitting



TR-830C-4
Point Fix Glass to
Glass Fitting



TR-830C-2
Top pivot pole short
Point Fix Top Fitting



TR-830C-3
Bottom pivot pole
short



TR-10U
Bottom patch



TR-20U
Upper patch




With Ball bearing



B=MAB D=DORMA



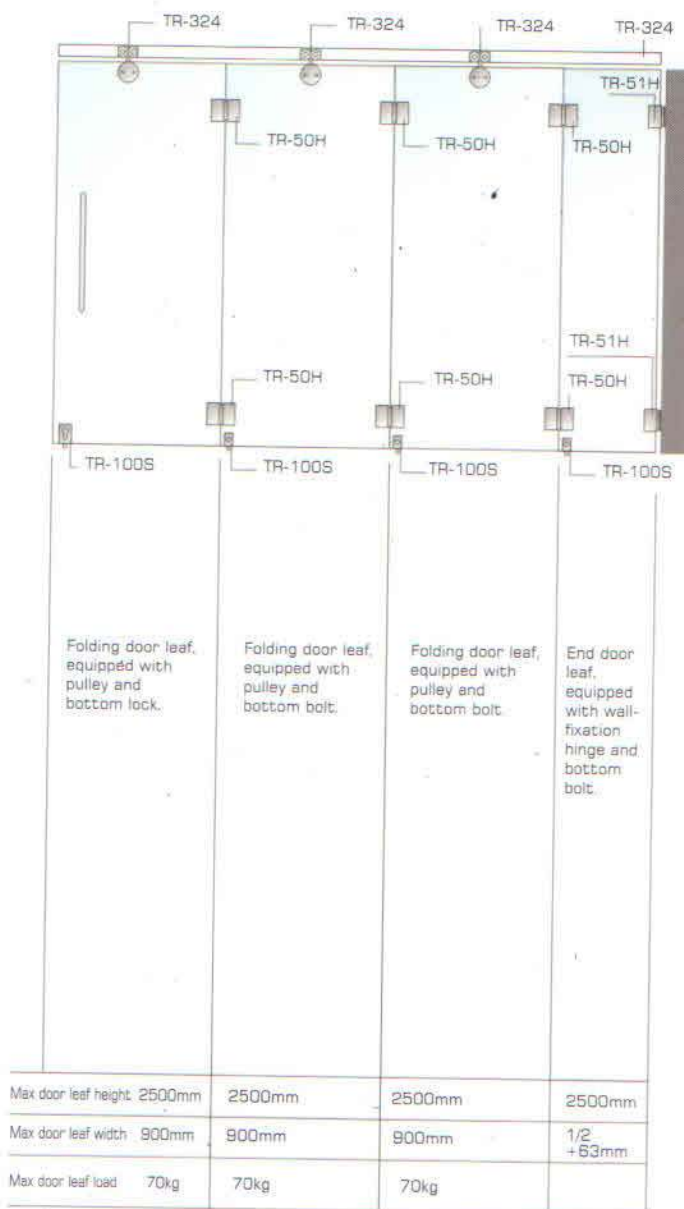

Structural components for movable glass partition system



TR-324
Folding door roller



TR-50H
Glass to glass hinge



TR-51H
Glass to wall hinge




TR-10A
Track



TR-100S
Corner lock



TR-529
Glass door bolt

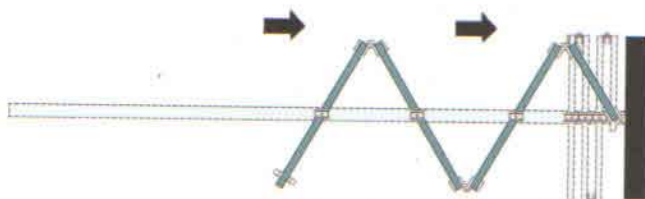

Note:
Max. Door Leaf Height: 2500mm
Max. Door Leaf Width: 900mm
Max. Door Leaf Load: 70kgs





AU-100
4.2 meters No need to drilling glass hole



AU-150-A



◆ **Specifications**

Model	AU-100		AU-150-A	
	Sliding	Double-leaf door	Single-leaf door	Double-leaf door
Door leaf weight	100kg*1	90kg*2	150kg*1	150kg*2
Door width	700~1300mm	700~1100mm	700~1500mm	700~1300mm
Open rate	100~550mm/s (Adjustable)		100~550mm/s (Adjustable)	
Opening hours	1~20 Seconds		1~20 Seconds	
Motor	DC24V Brushless DC Servo Motor		DC24V Brushless DC Servo Motor	
Reducer	Worm as a whole sealed structure		Worm as a whole sealed structure	
Supply voltage	Input AC180-250V;50-60Hz		Input AC180-250V;50-60Hz	
Ambient temperature	-20~50°C		-20~50°C	
Power failure back-up system	Select Accessories: DC24V7A*2 Batter		Select Accessories: DC24V7A*2 Batter	
Adaptive Access Control System	Select Accessories: credit card machines, induction card machines, remote control motor locks, access control network hosts		Select Accessories: credit card machines, induction card machines, remote control motor locks, access control network hosts	
Optional accessories	Select Accessories: Security light, Remote hand-voltage switchgear		Select Accessories: Security light, Remote hand-voltage switchgear	

◆ **Specifications**

Model	AU-280	
Sliding	Single-leaf door	Double-leaf door
Door leaf weight	180kg*1	150kg*2
Door width	700~1500mm	700~1300mm
Open rate	10~100mm/s (Adjustable)	
Opening hours	0-10seconds	
Motor	DC24V Brushless DC Servo Motor	
Reducer	Worm as a whole sealed structure	
Supply voltage	Input AC180-250V;50-60Hz	
Ambient temperature	-20~50°C	
Power failure back-up system	Select Accessories: DC24V7A*2 Batter	
Adaptive Access Control System	Select Accessories: credit card machines, induction card machines, remote control motor locks, access control network hosts	
Optional accessories	Select Accessories: Security light, Remote hand-voltage switchgear	



AU-280

The Standard



AU-2 x2pcs



AU-10 x2pcs



①



②



③



④

B Part (4Pcs)

The Optional



AU-1



AU-3



AU-4



AU-5



AU-6



AU-7



AU-8



AU-9

Can Choose A or B Part When Require Drilling Hole



A Part



Security Infrared C Part



TR-301 Brass / Zinc
Wall to Glass 90 Degree
Two screws each side fixing



TR-305 Brass / Zinc
Wall to Glass
Two screws each side fixing



TR-302 Brass / Zinc
Glass to Glass 135 Degree



TR-303 Brass / Zinc
Glass to Glass 180 Degree



TR-304 Brass / Zinc
Glass to Glass 90 Degree



TR-306 Brass / Zinc
Fixed Clip



TR-301A Wall to Glass
Straight edges Material
SS304,PSS / SSS finish



TR-303A
Glass to Glass 180 Degree
Straight edges Material
SS304,PSS / SSS finish



TR-301B
Wall to Glass Hydraulic Hinge
Material:Zinc,Brass



TR-303B
Glass to Glass Hydraulic Hinge
Material:Zinc,Brass



TR-301C
Wall to Glass 90 Degree
Material:Brass,
Stainless Steel Zinc



TR-302C
Wall to Glass 135 Degree
Material:Brass,
Stainless Steel Zinc



TR-303C
Glass to Glass 180 Degree
Material:Brass,
Stainless Steel Zinc



TR-304C
Glass to Glass 90 Degree
Material:Brass,
Stainless Steel Zinc



TR-306C Fixed Clip
Material:Brass,
Stainless Steel Zinc



TR-101 Wall to Glass
Material:Zinc,Brass



TR-103 Glass to Glass
Material:Zinc,Brass



TR-01D
Wall to Glass



TR-04D
Wall to Glass 90 Degree



TR-721
Wall to Glass



TR-722
Wall to Glass 90 Degree



TR-725
Glass to Glass 90 Degree



TR-726
Glass to Glass 135 Degree



TR-723
Wall to Glass 180 Degree



TR-724
Glass to Glass 180 Degree



TR-727 Connector
Three way connector



TR-61B



TR-62B



TR-17C
Size: $\Phi 40 \times 15 \text{mm}$



TR-999N



TR-883
8~10mm



TRL-001



TRL-002

Channel

Installation process:

1. first made the pipe of pneumatic underprop installation the need open an close cupboard door; installation size is about 70mm from cupboard door's runing axletree.
2. Keep cupboard door at the place of open 90 degree, made the pneumatic underprop free protend, then made the beanpole part rivet on rim of cupboard door.

Announements:

The pneumatic underprop's pipe part need upturned, the beanpolt part need adown.
Wish made the cupboard door open and close power increase installation size can at 80-100mm.
Wish made the cupboard door open and close power ally, installation size can at 50-90mm.



TRL-8/10/12



TR-921
Wall to Pipe
Material: Brass, Zinc



TR-914
Pipe to Glass
Material: Brass, Zinc



TR-914A
Pipe to Glass
Material: Brass, Zinc
One side closed



TR-923
Pipe to Glass
Material:
Stainless Steel 304,
Brass



TR-924B
Pipe to Pipe 135 Degree



TR-924
Pipe to Pipe 90 Degree



TR-915
Pipe to Pipe Adjustable
Material: Brass, Zinc



TR-901
Wall to Pipe
Material:
Stainless Steel 304,
Brass



TR-902
Pipe to Pipe T Connector
Material: Brass, Zinc



TR-01F
Door Stopper
Screws & wall
plugs included



TR-09S Mirror Nail
Materials: Brass + Aluminium
With screws
Φ 19, 25, 30, 32
Available in any diameter



for mirror

TR-664



TR-661

TR-665



TR-03
Glass to Glass (Two Way)



TR-03B
Glass to Glass (Two Way)



TR-04
Glass to Glass (Three Way)



TR-999 Glass Holder (Hollow)
Sizes: Dia 25x25mm Height 25x30mm Height
Dia 25x40mm Height
Various sizes & Solid glass holders available on order



TR-01A Wall to Glass



TR-01S Wall to Glass



TR-01 Φ 12x19
Glass to Glass (One Way)



TR-02 Φ 12x19/19
Glass to Glass (Two Way)



TR-205




TR-204-16




TR-218



TR-212



TR-214
For Glass sliding Door



TR-213



TR-210
can be both of 90° & 180°



TR-208
can be both of 135° & 180°



TR-206



TR-206A



TR-209F
perfect for 180°



TR-201



TR-203




TR-203A




TR-206B
Sandblast



TR-209
can be both of 135°



TR-202



TR-214V




TR-215N



TR-215




TR-216



TR-217



TR-209FA
Aluminium



TR-209FAB
Aluminium



TR-208A
Aluminium



TR-210A
Aluminium



TR-222
Acrylic waterstrip





★ TR-617



★ TR-692



TR-698
By Brass, Aluminium



★ TR-696



★ TR-694



TR-697



TR-7



★ TR-691



TR-617A
By Zinc



TR-605
By Australia Zinc, Grade A



★ TR-603



TR-690



TR-689



TR-488



TR-588



TR-613



TR-688
By Australia Zinc, Grade A



TR-788
By Australia Zinc, Grade A



TR-612




TR-824
By Australia Zinc, Grade A



TR-826

For glass thickness: 6~12mm
Material: Stainless Steel
Finish: Polished Stainless Steel (PSS)
Satin Stainless Steel (SSS)
Titanium Plated (TI)

FORMAT	D(Φ)	A	B
Φ19x200x450	19	200	450
Φ25x275x475	25	275	475

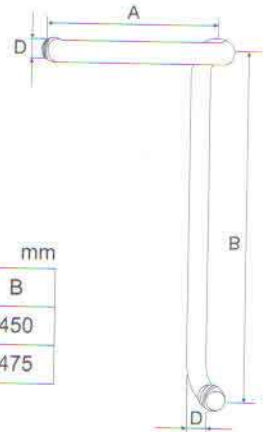

TR-603




TR-692

TR-821

For glass thickness: 6~12mm
Material: Stainless Steel
Finish: Polished Stainless Steel (PSS)
Satin Stainless Steel (SSS)
Titanium Plated (TI)

FORMAT	D(Φ)	A
Φ19x300	19	300
Φ19x400	19	400
Φ19x450	19	450
Φ19x500	19	500
Φ19x550	19	550
Φ19x600	19	600
Φ25x475	25	475

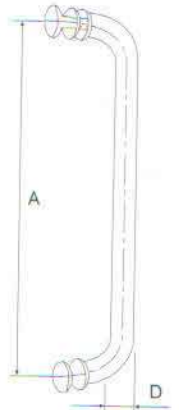


TR-822N

TR-822N


For glass thickness: 6~12mm
Material: Stainless Steel
Finish: Polished Stainless Steel (PSS)
Satin Stainless Steel (SSS)
Titanium Plated (TI)

FORMAT	D(Φ)	A
Φ19x300	19	300
Φ19x400	19	400
Φ19x450	19	450
Φ19x500	19	500
Φ19x550	19	550
Φ19x600	19	600
Φ25x475	25	475

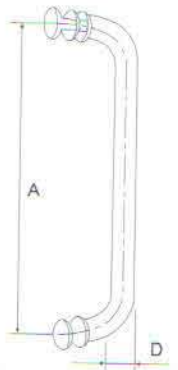


TR-829


For glass thickness: 8~15mm
Material: Stainless Steel
Finish: Polished Stainless Steel (PSS)
Satin Stainless Steel (SSS)
Titanium Plated (TI)



TR-830

For glass thickness: 8~15mm
Material: Stainless Steel
Finish: Polished Stainless Steel (PSS)
Satin Stainless Steel (SSS)
Titanium Plated (TI)




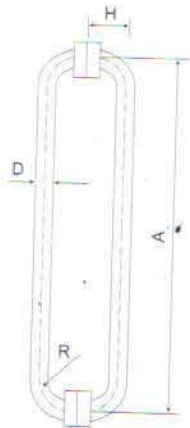

TR-827

For glass thickness: 8~15mm
 Material: Stainless Steel
 Finish: Polished Stainless Steel (PSS)
 Satin Stainless Steel (SSS)
 Titanium Plated (TI)


FORMAT	D(Φ)	A	H	R
Φ19x200	19	200	60	28
Φ25x275	25	275	70	35
Φ32x305	32	305	70	42
Φ38x350	38	350	80	58

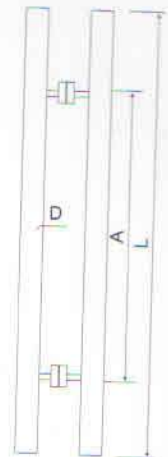

TR-833

For glass thickness: 8~15mm
 Material: Stainless Steel
 Finish: Polished Stainless Steel (PSS)
 Satin Stainless Steel (SSS)
 Titanium Plated (TI)


	mm								
L	500	600	700	800	1000	1200	1500	1800	2000
A	350	400	500	625	825	900	1020	1300	1500
D	Φ25/32/38								

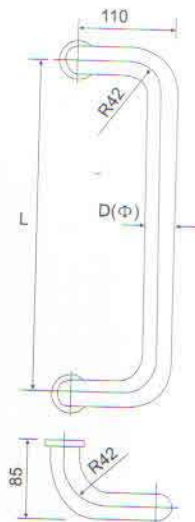

TR-828

For glass thickness: 8~15mm
 Material: Stainless Steel
 Finish: Polished Stainless Steel (PSS)
 Satin Stainless Steel (SSS)
 Titanium Plated (TI)


	mm	
L	D(Φ)	
305	25	
600	32	
800	38	

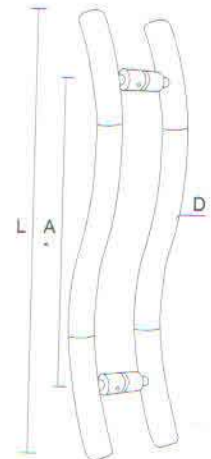

TR-850

For glass thickness: 8~15mm
 Material: Stainless Steel
 Finish: Polished Stainless Steel (PSS)
 Satin Stainless Steel (SSS)
 Titanium Plated (TI)
 Polished+Satin
 Stainless Steel (PSS+SSS)


	mm		
L	A	D	
350	250	Φ25	
600	400	Φ32	
600	400	Φ38	
800	600	Φ38	

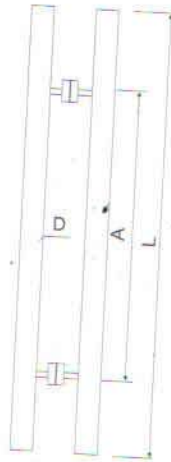

TR-833B

For glass thickness: 8~15mm
Material: Stainless Steel
Finish: Polished Stainless Steel (PSS)
Satin Stainless Steel (SSS)
Titanium Plated (TI)

	mm								
L	500	600	700	800	1000	1200	1500	1800	2000
A	350	400	500	625	825	900	1020	1300	1500
D	Φ25/32/38								

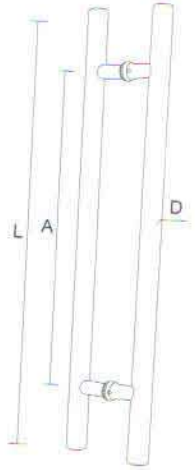

TR-833H

For glass thickness: 8~15mm
Material: Stainless Steel
Finish: Polished Stainless Steel (PSS)
Satin Stainless Steel (SSS)
Titanium Plated (TI)
Polished + Satin
Stainless Steel (PSS+SSS)


	mm		
L	A	D	
300	150	Φ25	
400	250	Φ25	
500	350	Φ25	
600	450	Φ25	
700	500	Φ25	
1000	700	Φ25	
1200	900	Φ25	
1500	1000	Φ25	



TR-833W

For glass thickness: 8~15mm
Material: Stainless Steel
Finish: Polished Stainless Steel (PSS)
Satin Stainless Steel (SSS)
Titanium Plated (TI)
Polished + Satin
Stainless Steel (PSS+SSS)


	mm		
L	A	D	
600	400	Φ38	
800	600	Φ38	
500	350	Φ32	
600	400	Φ32	

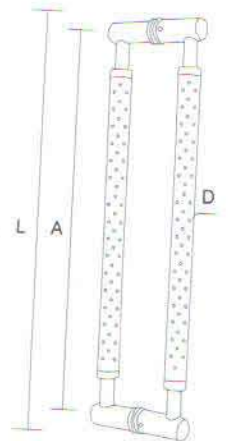

TR-836A

For glass thickness: 8~15mm
Material: Stainless Steel
Finish: Polished Stainless Steel (PSS)
Satin Stainless Steel (SSS)
Titanium Plated (TI)
Polished + Satin
Stainless Steel (PSS+SSS)


	mm		
L	A	D	
300	268	Φ25	
500	468	Φ32	

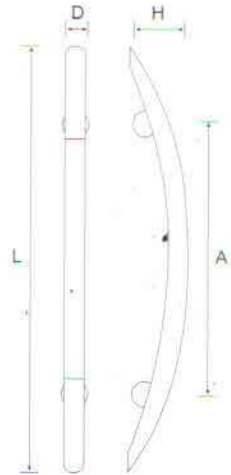

TR-837

For glass thickness: 8~15mm
 Material: Stainless Steel
 Finish: Polished Stainless Steel (PSS)
 Satin Stainless Steel (SSS)
 Titanium Plated (TI)
 Polished+Satin
 Stainless Steel(PSS+SSS)


	mm			
	L	A	H	D(Φ)
	460	260	65	25
	460	260	70	32

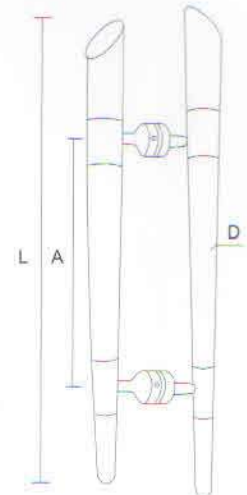

TR-846A

For glass thickness: 8~15mm
 Material: Stainless Steel
 Finish: Polished Stainless Steel (PSS)
 Satin Stainless Steel (SSS)
 Titanium Plated (TI)
 Polished+Satin
 Stainless Steel(PSS+SSS)

	mm	
FORMAT	A	L
Φ 32x410	210	410
Φ 38x525	370	525
Φ 32x600	300	600

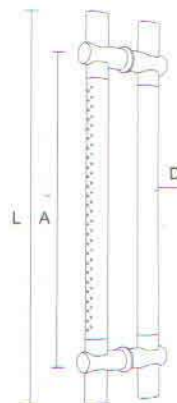


TR-847

For glass thickness: 8~15mm
 Material: Stainless Steel
 Finish: Polished Stainless Steel (PSS)
 Satin Stainless Steel (SSS)
 Titanium Plated (TI)
 Polished+Satin
 Stainless Steel(PSS+SSS)

Adjustable in Center to Center!


	mm						
L	450	600	800	1000	1200	1500	1800
A	305	425	625	825	900	1020	1300

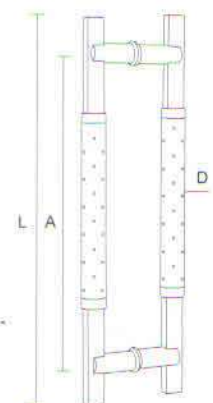

TR-847F

For glass thickness: 8~15mm
 Material: Stainless Steel
 Finish: Polished Stainless Steel (PSS)
 Satin Stainless Steel (SSS)
 Titanium Plated (TI)
 Polished+Satin
 Stainless Steel(PSS+SSS)


	mm		
L	A	D	
450	300	Φ32	
600	400	Φ32	
800	500	Φ32	

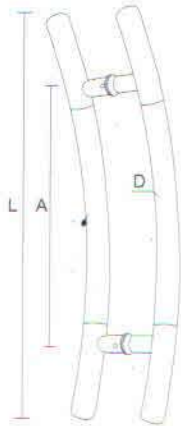

TR-851

For glass thickness: 8~15mm
 Material: Stainless Steel
 Finish: Polished Stainless Steel (PSS)
 Satin Stainless Steel (SSS)
 Titanium Plated (TI)
 Polished+Satin
 Stainless Steel(PSS+SSS)

mm		
L	A	D
320	200	Φ25
500	335	Φ32
600	400	Φ32
800	500	Φ38

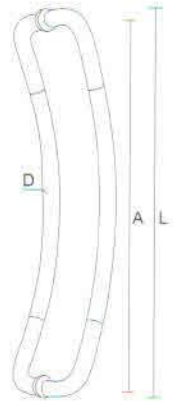

TR-855

For glass thickness: 8~15mm
 Material: Stainless Steel
 Finish: Polished Stainless Steel (PSS)
 Satin Stainless Steel (SSS)
 Titanium Plated (TI)
 Polished+Satin
 Stainless Steel(PSS+SSS)


mm									
L	200	275	350	400	450	500	600	700	800
D									Φ25/32/38



TR-833DR

For glass thickness: 8~15mm
 Material: Stainless Steel
 Finish: Polished Stainless Steel (PSS)
 Satin Stainless Steel (SSS)
 Titanium Plated (TI)
 Polished+Satin
 Stainless Steel(PSS+SSS)

mm		
L	A	D
500	300	Φ38
600	400	Φ38
800	600	Φ38
1000	700	Φ38

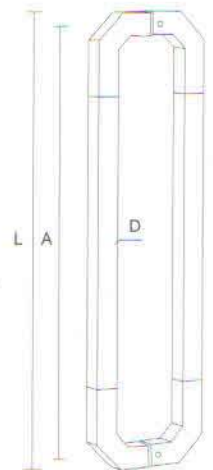

TR-840A

For glass thickness: 8~15mm
 Material: Stainless Steel
 Finish: Polished Stainless Steel (PSS)
 Satin Stainless Steel (SSS)
 Titanium Plated (TI)
 Polished+Satin
 Stainless Steel(PSS+SSS)

mm		
L	A	D
325	300	25x25
475	450	25x25
625	600	25x25




TR-833E

For glass thickness: 8~15mm

Material: Stainless Steel

Finish: Polished Stainless Steel (PSS)
Satin Stainless Steel (SSS)
Titanium Plated (TI)
Polished+Satin
Stainless Steel(PSS+SSS)

mm		
L	A	D
1000	800	Φ38
1200	1000	Φ38
1000	800	Φ32
1200	1000	Φ32
1500	1200	Φ32

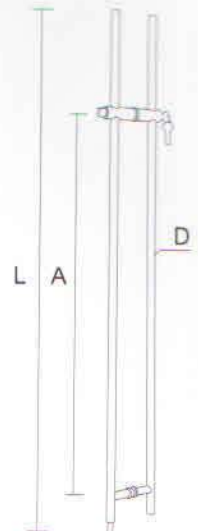


TR-849A

For glass thickness: 8~15mm

Material: Stainless Steel+Crystal

Finish: Polished Stainless Steel (PSS)
Satin Stainless Steel (SSS)
Titanium Plated (TI)
Polished+Satin
Stainless Steel(PSS+SSS)

mm		
L	A	D
1500	1130	Φ35

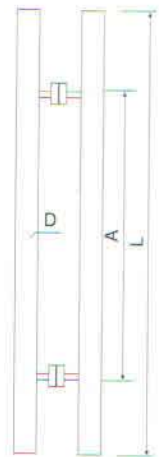


TR-115

For glass thickness: 8~15mm

Material: Stainless Steel

Finish: Polished Stainless Steel (PSS)
Satin Stainless Steel (SSS)
Titanium Plated (TI)
Polished+Satin
Stainless Steel(PSS+SSS)

mm		
L	A	D
800	500	Φ38

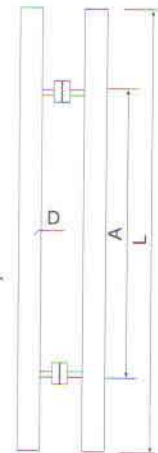

TR-116

For glass thickness: 8~15mm

Material: Stainless Steel

Finish: Polished Stainless Steel (PSS)
Satin Stainless Steel (SSS)
Titanium Plated (TI)
Polished+Satin
Stainless Steel(PSS+SSS)

mm		
L	A	D
600	330	Φ38

Terminology: D - Diameter A - Center to Center L - Total Length

Door Handles Available in PSS (Polished Stainless Steel), SSS (Satin/Brush Stainless Steel) & CMB (Combo Finish PSS/SSS)



200-4 Spider

TR-200-4 Four Leg Spider with Fin



TR-200-3 Two Leg Spider with Fin-180 Degree



TR-200-1L One Leg Spider with Fin



TR-354 Four Leg Spider



TR-352A Two Leg Spider-90 Degree



TR-352 Two Leg Spider-180 Degree



TR-351A One Leg Spider



TR-T02 Route
Class Thickness 8-15mm
Customized Routels for higher
thickness glass on order



Connector TR-02 Route
Class Thickness upto 12mm
(Countersunk type)



TR-1032-2



TR-1027

Lifting Suckers



TR-003C
Max weight up to:150kg
Material:Aluminium
Color:Yellow



TR-003B
Max weight up to:150kg
Material:Aluminium
Color:Black



TR-002
Max weight up to:80kg
Material:Aluminium
Color:Grey



TR-003
Max weight up to:100kg
Material:Aluminium
Color:Grey



TR-002B
Max weight up to:110kg
Material:Aluminium
Color:Black



TR-003B
Max weight up to:150kg
Material:Aluminium
Color:Black



TR-003Y
Max weight up to:150kg
Material:Aluminium
Color:Yellow



TR-003R
Max weight up to:150kg
Material:Aluminium
Color:Orange



TR-888P
Stainless Steel Pipes
Available in PSS Grade SS304 & SS201
Diameter 19 & 25mm
Length 3000 & 6000mm



Aluminium		
Inch	Dia(mm)	Thickness(mm)
5"	120mm	7mm
8"	200mm	10mm
9"	225mm	10mm
10"	250mm	10mm
12"	300mmB Type	900mm
12"	300mm	10mm
14"	350mmB Type	9mm
14"	350mm	10mm
16"	392mmB Type	9mm
16"	392mm	10mm
18"	400mm	10mm
18"	400mm	11mm
18"	450mm	11mm
18"	456mm	12mm
20"	500mm	12mm
24"	600mm	13.5mm
32"	800mm	15mm
40"	1000mm	20mm



TR-6061
Lazy susan

