


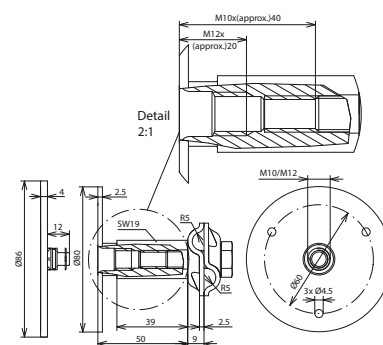

Type	EFPM M10 12 V4A MVK8.10 STTZN
Part No.	478 112
Connection thread	M10 / M12
Material of plate	StSt (V4A)
Material No.	1.4571 / 1.4404 / 1.4401
ASTM / AISI	316Ti / 316L / 316
Material of MV clamp	St/tZn
Clamping range clamp Rd / Rd	8-10 mm
Connection plate Ø	80 mm
Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C)	9.3 kA
Minimum lengths of M10 screws	35 mm (thread length 40 mm)
Minimum lengths of M12 screws	15 mm (thread length 20 mm)
Type	with O-ring and MV clamp
Standard	EN 62561-1

Net weight	276.4 g/pc(s)
GTIN	4013364118140
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

© DEHN (U.K.) LTD. • Unit 4 Velocity Point • Castleton Road • Armley • Leeds • LS12 2EE • United Kingdom • Tel. +44 113 541 8900 • info@dehn.co.uk • www.dehn.co.uk

 : Cross connector •  : Longitudinal connector •  : Parallel connector •  : T connector •  : Clamp for parallel connector •  : Clamp for T connector
 : Pipe clamp for parallel connector •  : Pipe clamp for T connector •  : Equipotential bonding bar •  : Bridging component